


# AP-SC25 Series Rotary Cutters

RETURN TO INDEX

Various Flow Requirements

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

Attachments

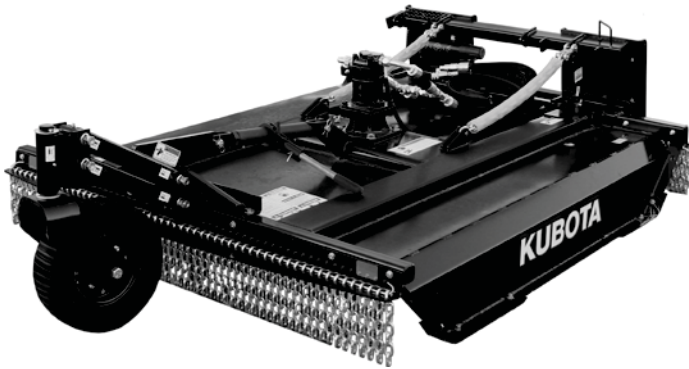

Cutting Height: 1.5" to 18" infinitely variable  
 Cutting Width: 60" or 72"  
 Overall Width: 60: 65½" 72: 78"  
 Overall Length: 60: 73" 72: 91"  
 Cutting Capacity: 2" Diameter  
 Blade Rotation: Clockwise  
 Blades & Blade Carrier: ½"x 4" Updraft,  
 Heavy Duty Round Pan Stump Jumper  
 Hitch: Skid Steer  
     Adjustable to Center or 8½" Right Offset  
 Deck: 10 Gauge Steel  
 Side Skirt Construction: 1/4" Steel  
 Front Deck Protection: Single Row Chain Guard, Standard Eq.  
 Rear Deck Protection: Double Row Chain Guard, Standard Eq.  
 Deck Lift Height Protection: Safety Chain Limiter  
 Deck Wear Protection: Optional Four Corner Mounted  
     Skid Shoes  
 Operator Protection: Optional Protective Door Shield  
 Cutting Height Gauging: Optional Pivoting & Adjustable  
     Front Mounted Gauge Wheel w/Laminated Tire  
 Maximum Operating Pressure: 3000 psi  
 Low Volume Drive Motors: For hyd. systems with  
     11-17 GPM flow at 1500-3000 PSI;  
 Medium Volume Drive Motors: For hyd. systems with  
     18-23 GPM flow at 1500-3000 PSI;  
 High Volume Drive Motors: For hyd. systems with  
     24-30 GPM flow at 1500-3000 PSI;  
 Low Volume Motor Blade Tip Speed: 18,540 FPM at 16 GPM  
 Med. Volume Motor Blade Tip Speed: 18,850 FPM at 21 GPM  
 High Volume Motor Blade Tip Speed: 19,000 FPM at 27 GPM  
 Hydraulic Hose Length: 80" Standard

**SKID STEER MUST BE EQUIPPED WITH A CASE DRAIN SYSTEM.**

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	LIST PRICE
AP-SC2560	<b>ROTARY CUTTER - 60" Width</b> Single Front Chain Guard Double Rear Chain Guard	984#	1020#	\$ 3,615
AP-SC2572	<b>ROTARY CUTTER - 72" Width</b> Single Front Chain Guard Double Rear Chain Guard	1236#	1284#	\$ 4,059
	<b><u>You May Choose a Gauge Wheel</u></b>			
-01	Single Gauge Wheel - Front Mounted	114#	114#	\$ 429
	<b><u>You Must Choose a Hydraulic Motor Assembly</u></b>			
-14	Hydraulic Motor: 11-17 GPM @ 3000 PSI			\$ 756
-15	Hydraulic Motor: 18-23 GPM @ 3000 PSI			\$ 756
-16	Hydraulic Motor: 24-30 GPM @ 3000 PSI			\$ 756
	<b><u>You May Choose a Pressure Gauge</u></b>			
-20	Motor Pressure Gauge	4#	4#	\$ 47
	<b><u>You May Choose a Skid Shoe Option</u></b>			
-41	Skid Shoes - Four Corners - 1/4" x 2"	10#	10#	\$ 74
-42	Heavy-Duty Skid Shoes - Four Corners - 3/8" x 3"	21#	21#	\$ 93