


AP-SRF27 Series Powered Rakes

RETURN TO INDEX

Minimum Hydraulics Required: 72: 12-19 gpm
90: 15-23 gpm

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

Attachments

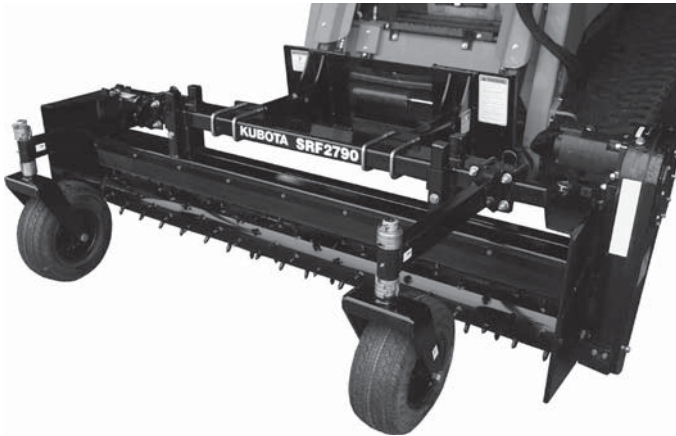

- Fixed Hitch
- Cast Chain Housing
- 5/8" U-Bolts on Gauge Wheel
- No Auxiliary Function Needed
- Drive Chain: #50 Double Continuous Roller Chain
High Tensile, Enclosed in Oil Bath
- End Plates with Storage Pins Gauge Wheels:
16.5" x 6.5" Air Tires with Sealant &
3/4" Roller Bearings
and Spacer Height Adjustment
- Replaceable Skid Shoes

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	LIST PRICE
AP-SRF2772	27 SERIES SKID STEER POWERED RAKE 72" Width; Carbide Tipped Studded Roller	711#	739#	\$ 7,985
AP-SRF2790	27 SERIES SKID STEER POWERED RAKE 90" Width; Carbide Tipped Studded Roller	940#	966#	\$ 8,880